



Level measurement device with guided radar

- Universal level measurement device for liquids
- Liquid interface measurement
- Insensitive to dust and steam
- 4...20 mA/HART, 2 wires
- ATEX/IECEx certifications

Product variants described in the data sheet may differ from the product presentation and description.

Can be combined with



Type 8619 ▶
multiCELL - Multi-channel
and multi-function
transmitter/controller



Type 8611 ▶
eCONTROL - Universal
controller



Type 8802 ▶
ELEMENT continuous
control valve systems -
overview



Type 8644 ▶
AirLINE SP electropneu-
matic automation system



Type 8793 ▶
Digital electropneumatic
Process Controller
SideControl

Type description

The Type 8188 is a level measurement device with cable, rod, both interchangeable probe or with coax probe, designed for continuous level measurement.

The unit is suitable for liquids, for industrial use in all areas of process technology. With a measuring range up to 75 m, the 8188 is best suited for tall vessels.

Even process conditions such as strong steam generation, density fluctuations or changes of the dielectric constant do not influence the accuracy of the measurement. Build-up or condensation on the probe or vessel wall do not influence the measuring result.

A liquid interface measurement is also possible with the Type 8188, typically an oil/water interface.


Table of contents

1. General technical data	3
1.1. About the device:.....	3
1.2. All variants.....	3
1.3. Variant with rod probe.....	5
1.4. Variant with cable version and gravity weight.....	5
1.5. Variant with coaxial probe.....	5
2. Approvals and conformities	6
2.1. General notes.....	6
2.2. Conformity	6
2.3. Standards.....	6
2.4. Explosion protection	6
3. Materials	7
3.1. Bürkert resistApp	7
4. Dimensions	7
4.1. Variant with rod probe.....	7
4.2. Variant with cable probe and gravity weight	8
4.3. Variant with coaxial probe.....	9
5. Performance specifications	10
5.1. Measuring range and blocking distance diagram.....	10
5.2. Measurement deviation diagram.....	11
Variant with rod probe in water	11
Variant with rod probe in oil	11
Variant with cable probe in water.....	12
Variant with cable probe in oil	12
Variant with coaxial probe in water	13
Variant with coaxial probe in oil	13
5.3. Temperature derating diagram	13
6. Product operation	14
6.1. Measuring principle.....	14
6.2. Product operation notes	14
Set up with display/configuration module	14
Set up with PACTware™/DTM and HART communication	14
7. Ordering information	15
7.1. Bürkert eShop	15
7.2. Bürkert product filter.....	15
7.3. Ordering chart	15
7.4. Ordering chart accessories.....	16

1. General technical data

1.1. About the device:

The device is available with a rod, cable or coaxial measuring probe. The technical data depends on the variant of the level measurement device with guided radar.

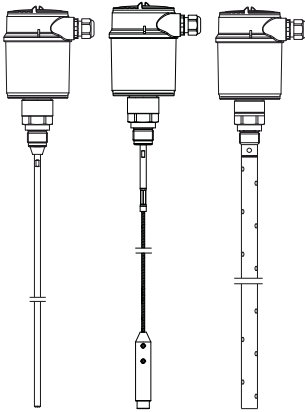

1.2. All variants

Product properties

Material

Make sure the device materials are compatible with the fluid you are using. Further information can be found in chapter [“3.1. Bürkert resistApp” on page 7](#).

Non wetted parts

Cover	PC transparent
Housing	Plastic PBT (Polyester), PPS and stainless steel 316L (1.4404)
Grounding terminal and screw	Stainless steel 316L
Seal	Between housing and cover: EPDM
Cable gland	PA
Blind plug	PA

Wetted parts

Seal	NBR with aramid fibres
Dimensions	Further information can be found in chapter “4. Dimensions” on page 7 .
Measured quantity	Level of liquids. For solids applications, please contact your local Bürkert Sales Center.
Measuring range	Further information can be found in chapter “5.1. Measuring range and blocking distance diagram” on page 10 .
Damping (63 % of the input variable)	0...999 s, adjustable

Product accessories

Display/configuration module	LCD in full dot matrix Further information can be found in chapter “7.4. Ordering chart accessories” on page 16 .
------------------------------	--

Performance data

Blocking distance	Further information can be found in chapter “5.1. Measuring range and blocking distance diagram” on page 10 .
Measuring range resolution	< 1 mm
Measurement deviation ^{1,2,3)}	According to DIN EN 60770-1: ± 2 mm Further information can be found in chapter “5.2. Measurement deviation diagram” on page 11 .
Non-repeatability	$\leq \pm 1$ mm (max.)
Measuring cycle time	< 500 ms
Step response time ^{3,4)}	≤ 3 s
Temperature drift	- Digital output: ± 3 mm/10 K relating to the max. measuring range or max. 10 mm - Current output: < 0.03 %/10K relating to the 16 mA span or ≤ 0.3 %
Filling/emptying speed	Max. 1 m/min

Electrical data

Operating voltage (U_n)	- Without display/configuration module: 9.6...35 V DC 9.6...30 V DC (Ex ia instrument) - With display/configuration module: 16...35 V DC 16...30 V DC (Ex ia instrument)
Power source (not supplied)	Limited power source according to UL/EN 62368-1 standards or limited energy circuit according to UL/EN 61010-1 §9.4
DC reverse polarity protection	Yes
Residual ripple (for DC)	For $9.6 \text{ V} < U_n < 18 \text{ V}$: $\leq 0.7 \text{ V}_{\text{eff}}$ (16...400 Hz) For $18 \text{ V} < U_n < 35 \text{ V}$: $\leq 1.0 \text{ V}_{\text{eff}}$ (16...400 Hz)
Overvoltage category according to IEC 61010-1	Category III
Protection class according to IEC 61010-1	Class III
Starting current	$\leq 3.6 \text{ mA}$, $\leq 10 \text{ mA}$ for 5 ms after the switching on
Load resistor	$(U_n - U_{\text{min}})/0.022 \text{ A}$
Output	4...20 mA/HART
Range of the output signal	3.8...20.5 mA/HART (default setting)
Signal resolution	0.3 μA
Max. output current	21.5 mA
Fault signal	Current output: last valid measured value, $\geq 21 \text{ mA}$ or $< 3.6 \text{ mA}$ (adjustable)
Voltage supply cable	- Cable diameter: 5...9 mm - Wire cross-section (spring-loaded terminals): - Massive wire, stranded wire: 0.2...2.5 mm² (AWG 24...14) - Stranded wire with end sleeve: 0.2...1.5 mm² (AWG 24...16)

Process/Pipe connection & communication

Process connection	Thread G or NPT - $\frac{3}{4}$ ", 1"
Electrical connection	Cable gland M20 x 1.5

Approvals and conformities

Directives

CE directive	Further information on the CE Directive can be found in chapter “2.3. Standards” on page 6 .
NAMUR recommendation	- NE21 – Electromagnetic compatibility of equipment - NE43 – Signal level for fault information from measuring transducers - NE53 – Compatibility of field devices and display/adjustment components - NE107 – Self-monitoring and diagnosis of field devices
Explosion protection	ATEX/IECEX: EN IEC 60079-0, EN 60079-11, EN 60079-26 Further information can be found in chapter “2.4. Explosion protection” on page 6 .

Environment and installation

Ambient temperature	Operation and storage: -40...+80 °C (-40...+176 °F) (with display/configuration module)
Temperature derating	Depending on the device variant. Further information can be found in chapter “5.3. Temperature derating diagram” on page 13 .
Relative air humidity	20...85 %, without condensation
Height above sea level	Max. 2000 m (by default; max. 5000 m with connected overvoltage protection)
Degree of protection according to IEC/EN 60529	IP66/IP67 with cable plug mounted and tightened M20 x 1.5
Pollution degree	Degree 4 (when used with fulfilled housing protection)

- 1.) Depending on the mounting conditions, deviations can occur which can be rectified by adapting the adjustment or changing the measured value offset in the DTM service mode.
 2.) The blocking distances can be optimized by a false signal suppression.
 3.) Time span a sudden measuring distance change by max. 0.5 m in liquid applications, until the output signal signal has taken for the first time 90 % of the final value (IEC 61298-2).

1.3. Variant with rod probe

Product properties	
Material	
Wetted parts	
Process connection	- Stainless steel 316L (1.4404 or 1.4435) and PPS (variant up to 6 bar) - Stainless steel 316L (1.4404 or 1.4435) and PEEK (variant up to 40 bar)
Probe	Rod-Ø 8 mm in stainless steel 316L (1.4404 or 1.4435)
Seal	Process seal on the instrument side (rod lead-through) in EPDM
Weight	Housing: 890 g Rod-Ø 8 mm: approx. 400 g/m
Probe length	0.3...6 m (lateral load: 10 Nm)
Medium data	
Process temperature	-40...+80 °C (-40...+176 °F) (for variant up to 6 bar) -40...+150 °C (-40...+302 °F) (for variant up to 40 bar)
Process pressure	-1...+6 bar (-100...+600 kPa/-14.5...+87 psig) (for process connection in stainless steel 316L (1.4404 or 1.4435) and PPS) -1...+40 bar (-100...+4000 kPa/-14.5...+580 psig) (for process connection in stainless steel 316L (1.4404 or 1.4435) and PEEK)
Dielectric constant (min.)	$\epsilon_r > 1.6$

1.4. Variant with cable version and gravity weight

Product properties	
Material	
Wetted parts	
Process connection	- Stainless steel 316L (1.4404 or 1.4435) and PPS (variant up to 6 bar) - Stainless steel 316L (1.4404 or 1.4435) and PEEK (variant up to 40 bar)
Inner conductor	Up to separation cable: stainless steel 316L (1.4404 or 1.4435)
Probe	Cable-Ø 4 mm with gravity weight in stainless steel 316L (1.4404 or 1.4435)
Seal	Process seal on the instrument side (cable lead-through) in EPDM
Weight	- Housing: 890 g - Cable-Ø 4 mm: approx. 60 g/m - Gravity weight: approx. 200 g
Probe length	0.5...75 m (max. tensile load: 2.5 kN)
Medium data	
Process temperature	-40...+80 °C (-40...+176 °F) (for variant up to 6 bar) -40...+150 °C (-40...+302 °F) (for variant up to 40 bar)
Process pressure	-1...+6 bar (-100...+600 kPa/-14.5...+87 psig) (for process connection in stainless steel 316L (1.4404 or 1.4435) and PPS) -1...+40 bar (-100...+4000 kPa/-14.5...+580 psig) (for process connection in stainless steel 316L (1.4404 or 1.4435) and PEEK)
Dielectric constant (min.)	$\epsilon_r > 1.6$

1.5. Variant with coaxial probe

Product properties	
Material	
Wetted parts	
Process connection	Stainless steel 316L (1.4404 or 1.4435) and PEEK
Inner conductor	Up to separation rod: stainless steel 316L (1.4404 or 1.4435)
Probe	Coaxial-Ø 21.3 mm (tube) in stainless steel 316L (1.4404 or 1.4435)
Seal	Process seal on the instrument side (rod lead-through) in EPDM
Weight	- Housing: 890 g - Coaxial-Ø 21.3 mm: approx. 1110 g/m
Probe length	0.3...6 m (lateral load: 60 Nm)

Medium data

Process temperature	-40...+150 °C (-40...+302 °F)
Process pressure	-1...+40 bar (-100...+4000 kPa/-14.5...+580 psig)
Dynamic viscosity η	0.1...500 mPa s (requirement: with density 1)
Dielectric constant (min.)	$\epsilon_r > 1.4$

2. Approvals and conformities

2.1. General notes

- The approvals and conformities listed below must be stated when making enquiries. This is the only way to ensure that the product complies with all required specifications.
- Not all available versions can be supplied with the below mentioned approvals or conformities.

2.2. Conformity

In accordance with the Declaration of Conformity, the product is compliant with the EU Directives.

2.3. Standards

The applied standards which are used to demonstrate compliance with the EU Directives are listed in the EU-Type Examination Certificate and/or the EU Declaration of Conformity.

2.4. Explosion protection


Note:

Devices with Ex certification have different technical data, see **Supplement ATEX/IECEx Type 8188** ► under "User manuals".

Approval	Description
 	Optional: Explosion protection Ex marking of the components according to: ATEX: TÜV 19 ATEX 260229X - II 1G Ex ia IIC T6...T1 Ga resp. - II 1/2G Ex ia IIC T6...T1 Ga/Gb resp. - II 2G Ex ia IIC T6...T1 Gb IECEx: IECEx TUN 19.0021X - Ex ia IIC T6...T1 Ga resp. - Ex ia IIC T6...T1 Ga/Gb resp. - Ex ia IIC T6...T1 Gb Measures for compliance with ATEX/IECEx requirements: see Additional manual/Supplement ATEX/IECEx Type 8188 ► under "User manuals". The Ex. certification is only valid if the Bürkert device is used as described in the additional manual/supplement. Any unauthorized modifications made to the device will invalidate the Ex certification.

3. Materials

3.1. Bürkert resistApp

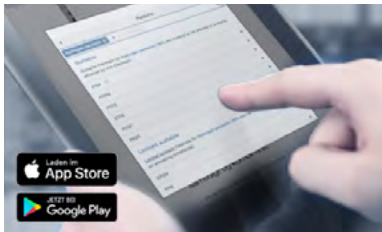

Bürkert resistApp – Chemical resistance chart


You want to ensure the reliability and durability of the materials in your individual application case? Verify your combination of media and materials on our website or in our resistApp.

[Start chemical resistance check](#)

4. Dimensions

4.1. Variant with rod probe


Note:
Dimensions in mm, unless otherwise stated

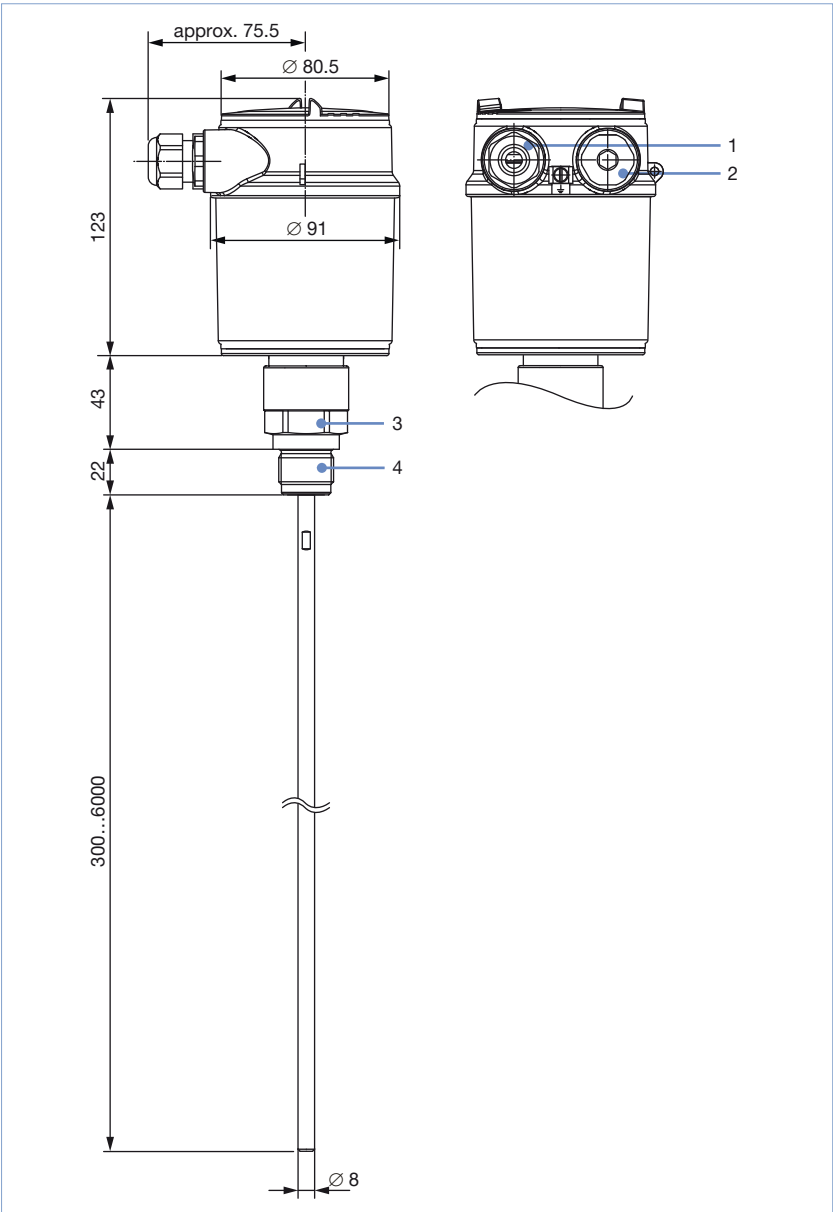

No.	Element
1	Cable gland M20 × 1.5
2	Blind plug M20 × 1.5
3	AF36 for G or NPT ¾"
	AF41 for G or NPT 1"
4	G or NPT ¾"
	G or NPT 1"

4.2. Variant with cable probe and gravity weight


Note:
Dimensions in mm, unless otherwise stated

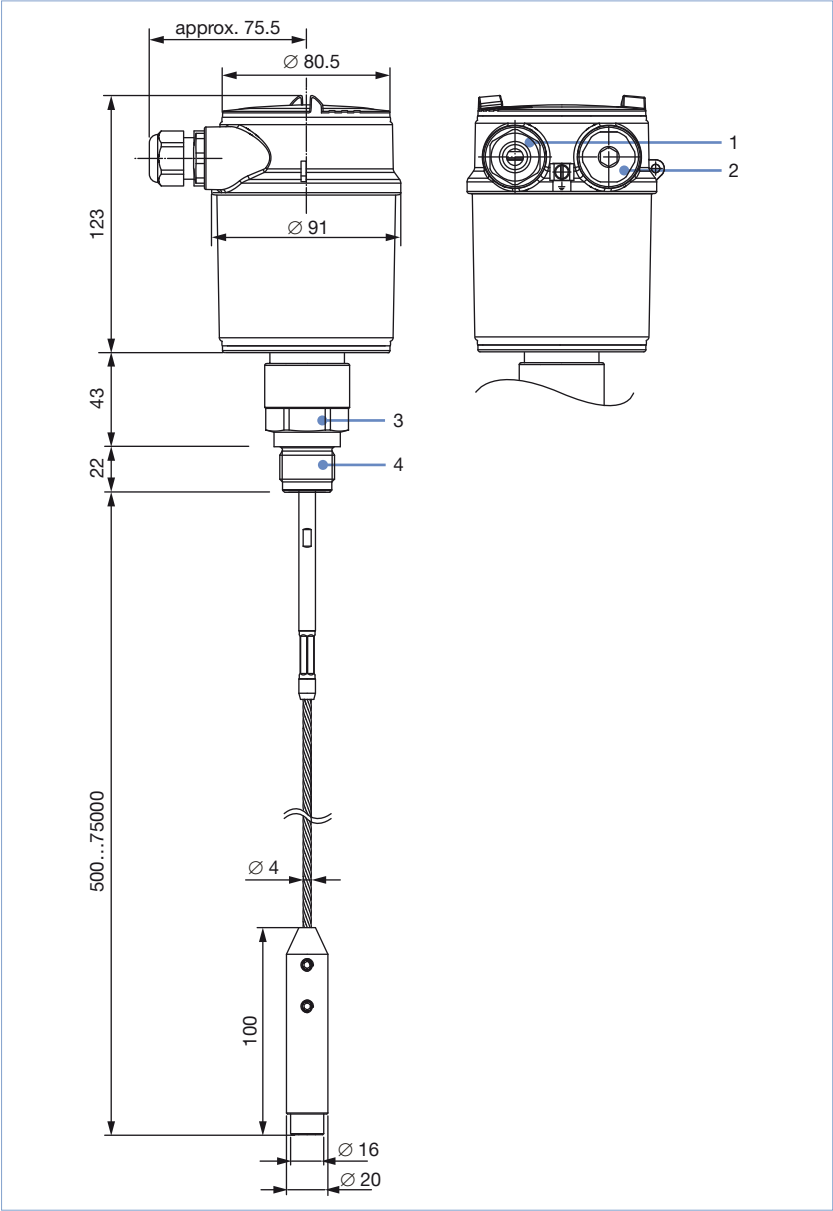

No.	Element
1	Cable gland M20 × 1.5
2	Blind plug M20 × 1.5
3	AF36 for G or NPT ¾"
	AF41 for G or NPT 1"
4	G or NPT ¾"
	G or NPT 1"

4.3. Variant with coaxial probe


Note:
Dimensions in mm, unless otherwise stated

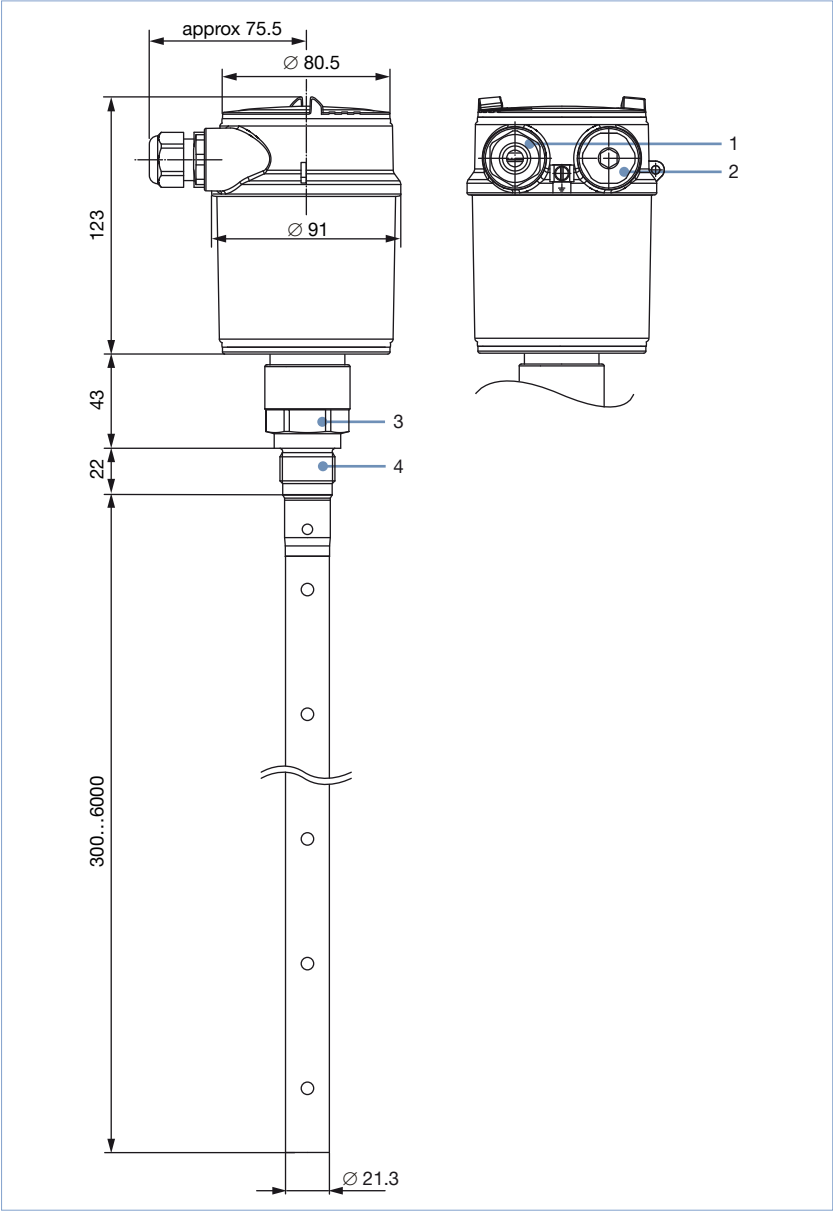

No.	Element
1	Cable gland M20 × 1.5
2	Blind plug M20 × 1.5
3	AF36 for G or NPT ¾"
	AF41 for G or NPT 1"
4	G or NPT ¾"
	G or NPT 1"

5. Performance specifications

5.1. Measuring range and blocking distance diagram

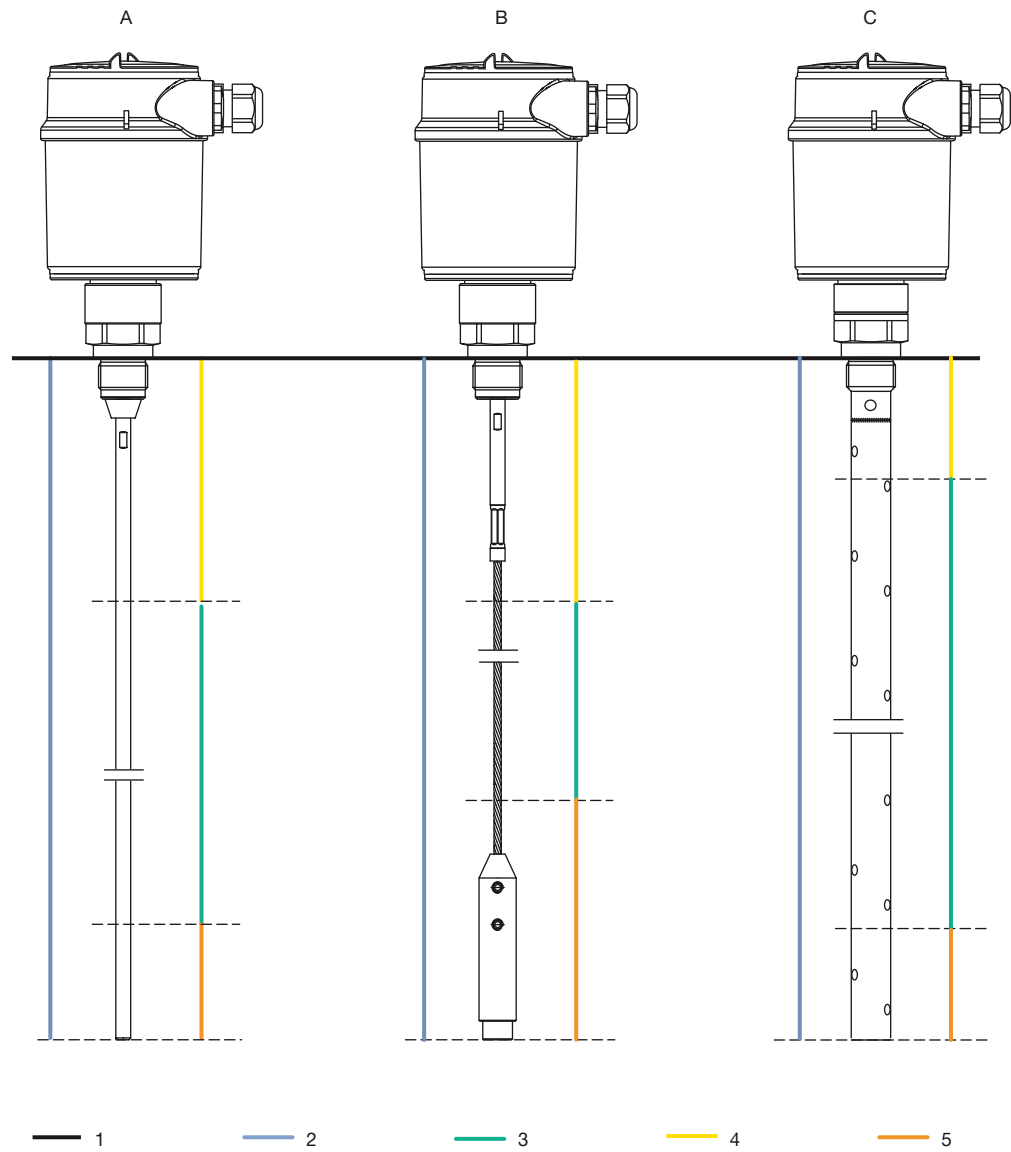

Range length				
No.	Description	A: rod variant	B: cable variant	C: coaxial variant
1	Reference plane	–	–	–
2	Measuring probe length	0.3...6 m	0.5...75 m	0.3...6 m
3	Measurement range	In water: 0.08...6 m In oil: 0.15...5.95 m	In water: 0.08...75 m In oil: 0.15...74.85 m	In water: 0.03...6 m In oil: 0.10...5.95 m
4	Upper blocking distance	In water: 0.08 m In oil: 0.15 m	In water: 0.08 m In oil: 0.15 m	In water: 0.03 m In oil: 0.10 m
5	Lower blocking distance	In water: 0 m In oil: 0.05 m	In water: 0 m In oil: 0.15 m	In water: 0 m In oil: 0.05 m


DTS 1000244851 EN Version: M Status: RL (released | freigegeben | validé) printed: 09.01.2025

5.2. Measurement deviation diagram

Variant with rod probe in water

Note:


- The blocking distance is indicated by the grey area in the diagram. No measurement is possible in this area.
- The length L represents the length of the probe.

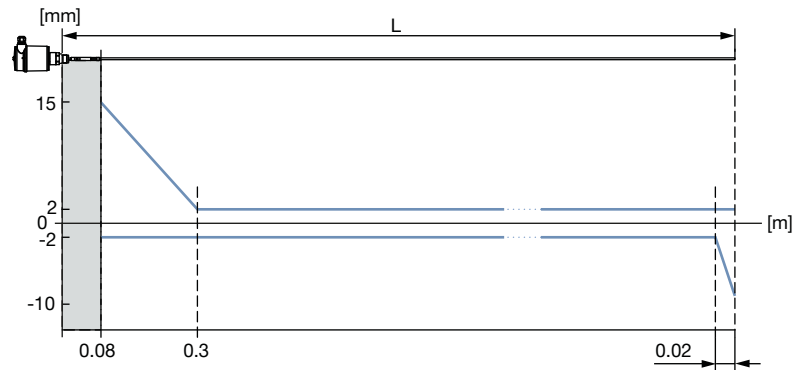

Variant with rod probe in oil


Note:

- The blocking distance is indicated by the grey area in the diagram. No measurement is possible in this area.
- The length L represents the length of the probe.

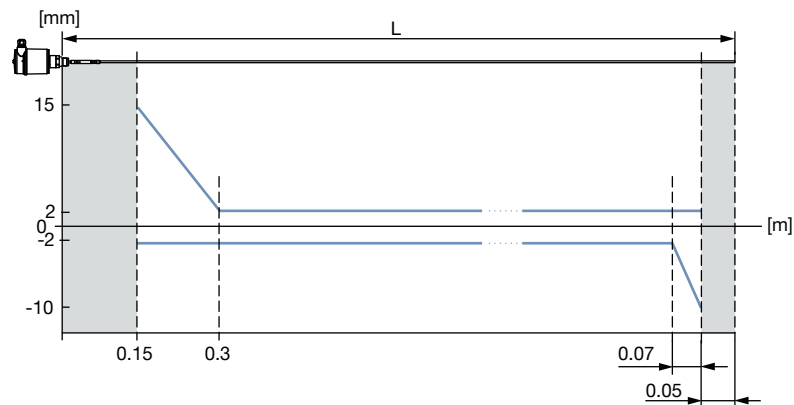


Variant with cable probe in water
Note:

- The blocking distance is indicated by the grey area in the diagram. No measurement is possible in this area.
- The length L represents the length of the probe.

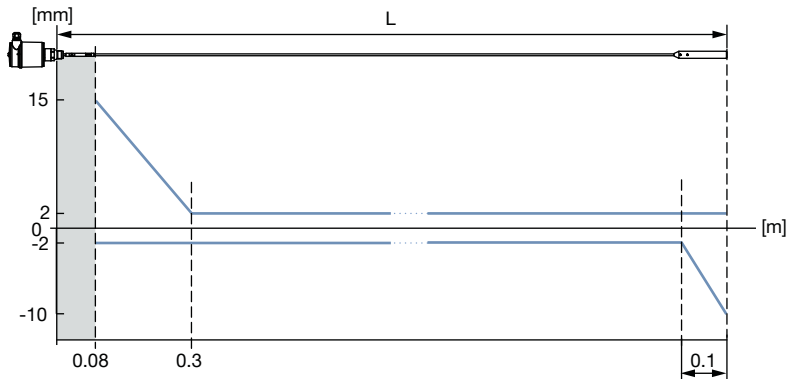
Variant with cable probe in oil
Note:


- The blocking distance is indicated by the grey area in the diagram. No measurement is possible in this area.
- The length L represents the length of the probe.

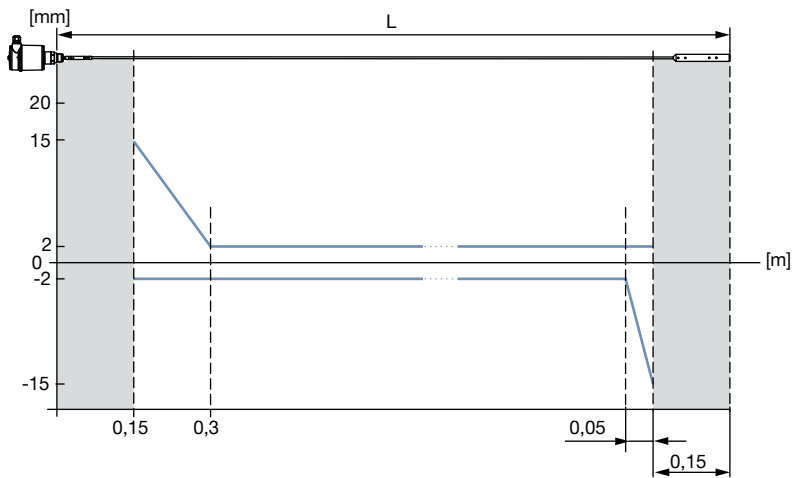

Variant with coaxial probe in water

Note:


- The blocking distance is indicated by the grey area in the diagram. No measurement is possible in this area.
- The length L represents the length of the probe.

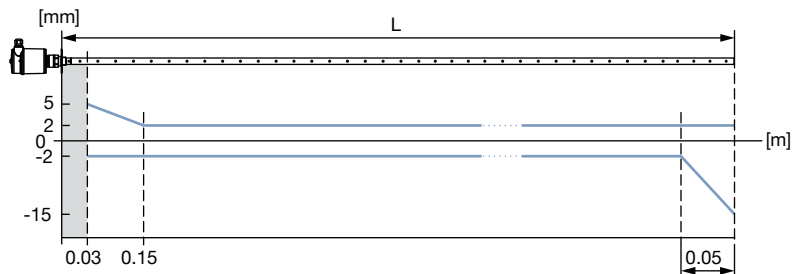


Variant with coaxial probe in oil

Note:

- The blocking distance is indicated by the grey area in the diagram. No measurement is possible in this area.
- The length L represents the length of the probe.

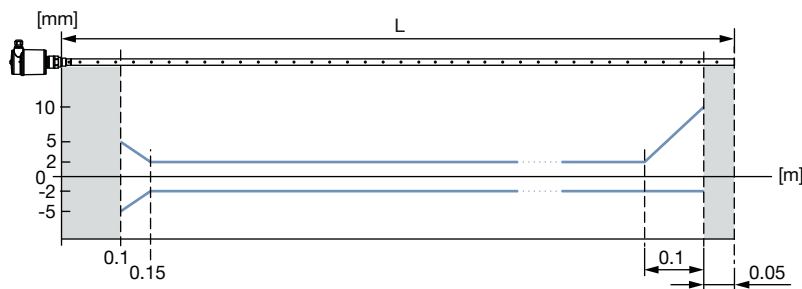

5.3. Temperature derating diagram

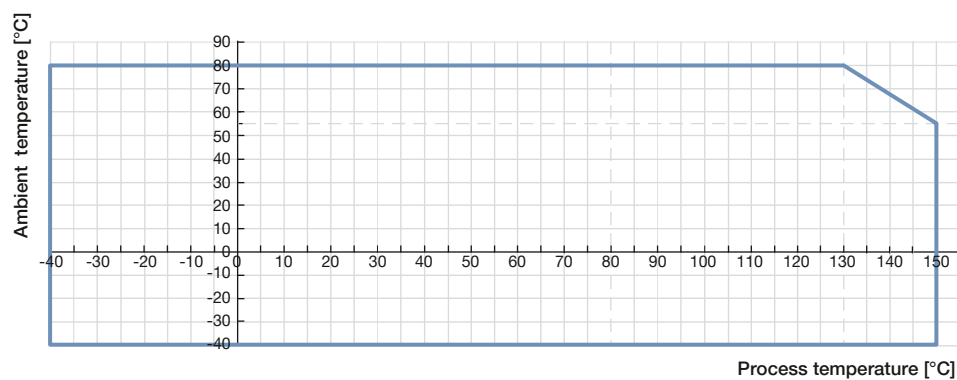

6. Product operation

6.1. Measuring principle

High frequency microwave pulses are guided along a steel cable, a rod or a coaxial cable. When they reach the product surface, the microwave pulses are reflected and received by the processing electronics. The running time is evaluated by the instrument and outputted as distance. Time consuming adjustment with medium is not necessary. The instruments are pre-set to the ordered probe length. The shortenable cable, rod and coaxial variants can be adapted individually to the local requirements.

6.2. Product operation notes

The measuring device can be adjusted with:


- The display/configuration module
- The suitable Bürkert DTM in conjunction with a software according to the FDT/DTM standard, e.g. PACTware™ and PC
- With a HART handheld

The entered parameters are generally saved in the measuring device Type 8188. Optionally, parameters may also be uploaded and downloaded with the display/configuration module or saved in a file by using PACTware™/Type 8188-DTM.

Set up with display/configuration module

Display/configuration module	Description
	The display/configuration module can be inserted into the measuring device and removed again at any time. It is not necessary to interrupt the power supply. The measuring device is adjusted via the four keys of the display/configuration module.

Set up with PACTware™/DTM and HART communication

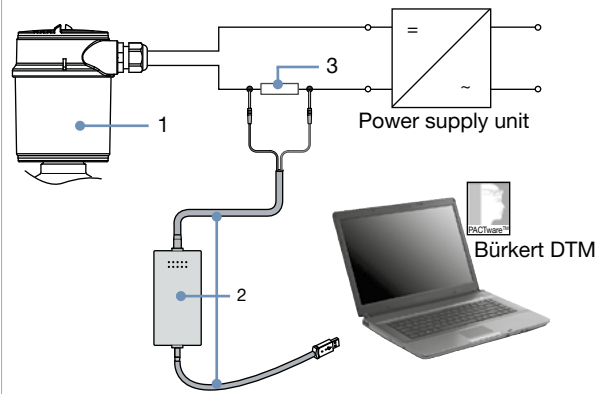Assembly	Description								
	The measuring device can be operated thanks to PACTware™, via HART communication. An interface adapter is necessary for the adjustment with PACTware™. For the setup of the Type 8188, the DTM in the actual version must be used. The basic version of DTM incl. PACTware™ is available as a free-of-charge download from the internet at www.burkert.com ►. Connecting the PC via HART <table><tr><th>No.</th><th>Description</th></tr><tr><td>1</td><td>Measuring device Type 8188</td></tr><tr><td>2</td><td>HART-USB Modem</td></tr><tr><td>3</td><td>Resistance 250 Ω</td></tr></table> Necessary components: • Measuring device Type 8188 • PC with PACTware™ and suitable Bürkert DTM • HART-USB Modem • Resistance approx. 250 Ω • Power supply unit	No.	Description	1	Measuring device Type 8188	2	HART-USB Modem	3	Resistance 250 Ω
No.	Description								
1	Measuring device Type 8188								
2	HART-USB Modem								
3	Resistance 250 Ω								

7. Ordering information

7.1. Bürkert eShop



Bürkert eShop – Easy ordering and quick delivery

You want to find your desired Bürkert product or spare part quickly and order directly? Our online shop is available for you 24/7. Sign up and enjoy all the benefits.

[Order online now](#)

7.2. Bürkert product filter



Bürkert product filter – Get quickly to the right product

You want to select products comfortably based on your technical requirements? Use the Bürkert product filter and find suitable articles for your application quickly and easily.

[Try out our product filter](#)

7.3. Ordering chart

Note:
The following variants are supplied with display/configuration module.

Description	Operating voltage	Sensor variant	Probe length	Output	Electrical connection	Article no.
Standard variant						
G ¾" mounting thread, PN 6, temp. max. 80 °C	16...35 V DC	Rod	1 m	4...20 mA/HART (2 wires)	Cable gland M20 × 1.5	565800
			2 m			565804
		Cable	5 m			565812
			10 m			565816
		Coaxial	1 m			565823
			2 m			565824
		Rod	1 m			565802
			2 m			565806
G 1" mounting thread, PN 40, temp. max. 150 °C		Cable	5 m			565814
			10 m			565818
		Coaxial	1 m			565825
			2 m			565826
		Rod	1 m			565801
			2 m			565805
		Cable	5 m			565813
			10 m			565817
NPT ¾" mounting thread, PN 6, temp. max. 80 °C		Coaxial	1 m			565827
			2 m			565828
		Rod	1 m			565803
			2 m			565807
		Cable	5 m			565815
			10 m			565819
		Coaxial	1 m			565829
			2 m			565830
NPT 1" mounting thread, PN 40, temp. max. 150 °C		Rod	1 m			565803
			2 m			565807
		Cable	5 m			565815
			10 m			565819
		Coaxial	1 m			565829
			2 m			565830
		Rod	1 m			565803
			2 m			565807

Description	Operating voltage	Sensor variant	Probe length	Output	Electrical connection	Article no.	
Ex variant - ATEX certification							
G ¾" mounting thread, PN 6, temp. max. 80 °C	16...30 V DC	Rod	1 m	4...20 mA/HART (2 wires)	Cable gland M20 × 1.5	565808 	
			2 m			565810 	
		Cable	5 m			565820 	
			Coaxial			1 m	565831 
						2 m	565832 
			G 1" mounting thread, PN 40, temp. max. 150 °C			16...30 V DC	Rod
2 m	565811 						
Cable	5 m	565821 					
	Coaxial	1 m		565833 			
		2 m		565834 			
	Ex variant - IECex certification						
NPT ¾" mounting thread, PN 6, temp. max. 80 °C	16...30 V DC	Rod	1 m	4...20 mA/HART (2 wires)	Cable gland M20 × 1.5	565839 	
			2 m			565840 	
		Cable	5 m			565841 	
			Coaxial			1 m	565835 
						2 m	565836 
			NPT 1" mounting thread, PN 40, temp. max. 150 °C			16...30 V DC	Rod
2 m	565843 						
Cable	5 m	565844 					
	Coaxial	1 m		565837 			
		2 m		565838 			

Further variants on request

 Material - FFKM - Alloy C22 (2.4602)	 Temperature -40...+200 °C
 Process connection - Thread G or NPT ½" (PN 40 ,150 °C), 1½" - Flange DN 25, DN 40, DN 50, DN 80, DN 100, DN 150 - Flange 1", 1 ½", 2", 3", 4", 6"	 Additional With display

7.4. Ordering chart accessories

Description	Article no.
Set with two adaptors M20 × 1.5 /NPT ½", two neoprene flat seals for cable gland or plug and two screw plugs M20 × 1.5	551782 
Hart-USB Modem	560177 
Set with a display/configuration module, a transparent cover and a sealing ring	559279 
Set with a transparent cover and a sealing ring	561006 