



Redox Sensor Cube


- Fully compatible with büS systems and a wide range of further analysis sensor cubes
- Hot swap compatible for exchanging the sensor cube during operation
- Minimal sample water consumption
- Available in 2 variants: standard and with drinking water approval (ACS)

Product variants described in the data sheet may differ from the product presentation and description.

Can be combined with



Type 8905 ▶
Online Analysis System



Type 8920 ▶
Bürkert Communicator

Type description

This sensor cube measures the oxidation reduction potential in the water and is designed for operation on a fluidic backplane in the device Type 8905 online analysis system.

The Redox value is one of the most important water parameters. The value is an indicator for the activity of the disinfectant, with no measure of the applied dose but with measure of the remaining residual.

The electrical and fluidic connections are made via the backplane of the system. The sensor cube communicates with the system via the digital büS interface, allowing fully automatic login to the online analysis system. If the sensor is plugged into the system, it automatically logs on to the büS and can be parameterised according to customer requirements.

The sensor cube is available in 2 variants. The standard version provides protection against biological growth on the reference electrode and is recommended for applications with no or very low chlorine in the water. The drinking water version is without anti-fouling equipment and is mainly required in applications with drinking water approval.

Table of contents

1. General technical data	3
2. Materials	4
2.1. Chemical Resistance Chart – Bürkert resistApp.....	4
3. Dimensions	4
4. Product installation	5
4.1. Installation notes.....	5
5. Product design and assembly	5
5.1. Product features	5
6. Ordering information	6
6.1. Bürkert eShop – Easy ordering and quick delivery.....	6
6.2. Bürkert product filter.....	6
6.3. Ordering chart.....	6
6.4. Ordering chart accessories.....	6

1. General technical data

Product properties

Material

Please make sure the device materials are compatible with the fluid you are using.

Detailed information can be found in chapter [“2.1. Chemical Resistance Chart – Bürkert resistApp” on page 4.](#)

Housing	PPE+PS
Lever	Zamak
Seals	EPDM
Dimensions	Detailed information can be found in chapter “3. Dimensions” on page 4.
ORP sensor	Platinum potentiometric 2-electrode measuring cell
Electrolyte (reference electrode)	<ul style="list-style-type: none"> Standard version: Ag/AgCl, 3 mol KCl with biocide for use without chlorine (<0.2 ppm) Drinking water version: Ag/AgCl, 3 mol KCl without biocide
Compatibility	With Online Analysis System Type 8905 (the electrical and fluidic contact is made via backplane system.) Detailed information can be found in the data sheet of the online analysis system, see data sheet Type 8905 ▶ for more information.
Measuring range	2000...+2000 mV
Maintenance	12 months nominal, depending on the water quality

Performance data

ORP measurement

Measurement deviation	± 10 mV
Response time (t_{90})	< 10 s

Electrical data

Operating voltage	24 V DC through the backplane of the system Type 8905 via bÜS
Power consumption	0.8 VA

Media data

Fluid	Water without particles: drinking water, industrial water
pH range	pH 4...pH 9

Sample water

Temperature	+ 3...+ 40 °C (+ 37...+ 104 °F)
Pressure	PN3
Flow rate	> 6 l/h

Process/Port connection & communication

Process connection	Via pinch valve in the fluidic backplane of the Type 8905 Detailed information can be found in the data sheet of the Online Analysis System, see data sheet Type 8905 ▶ for more information.
Electrical connection	Spring contacts in the fluidic backplane of the Type 8905, which is connected to a bÜS System Detailed information can be found in the data sheet of the Online Analysis System, see data sheet Type 8905 ▶ for more information.

Data transfer

Internal communication	Through bÜS (Bürkert bus, CANopen protocol)
External communication by status LED	According to NAMUR NE 107

Approvals and Certificates

Standards

Degree of protection according to IEC/ EN 60529	<ul style="list-style-type: none"> IP65, when plugged in the fluidic backplane IP20, as standalone product
---	--

Directives

CE directives	The applied standards, which verify conformity with the EU Directives, can be found on the EU Type Examination Certificate and/or the EU Declaration of conformity (if applicable)
---------------	--

Environment and installation


Ambient temperature

Operating	0...+ 40 °C (+ 32...+ 104 °F)
-----------	-------------------------------

Storage and transport	For empty/purged sensor cube <ul style="list-style-type: none"> -10...+60 °C (+14...+140 °F) without the reference electrode +3...+40 °C (+37...+104 °F) with the reference electrode
Relative air humidity	≤90 %, without condensation
Height above sea level	Max. 2000 m
Operating condition	Continuous
Equipment mobility	Fixed
Application range	Indoor and outdoor (Protect the device against electromagnetic interference, ultraviolet rays and, when installed outdoors, against the effects of climatic conditions)
Installation category	Category I according to UL/EN 61010-1
Pollution degree	Degree 2 according to UL/EN 61010-1

2. Materials

2.1. Chemical Resistance Chart – Bürkert resistApp

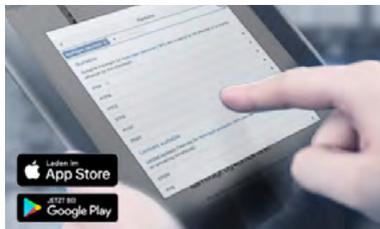

Bürkert resistApp – Chemical Resistance Chart


You want to ensure the reliability and durability of the materials in your individual application case? Verify your combination of media and materials on our website or in our resistApp.

[Start Chemical Resistance Check](#)

3. Dimensions

Note:

Dimensions in mm

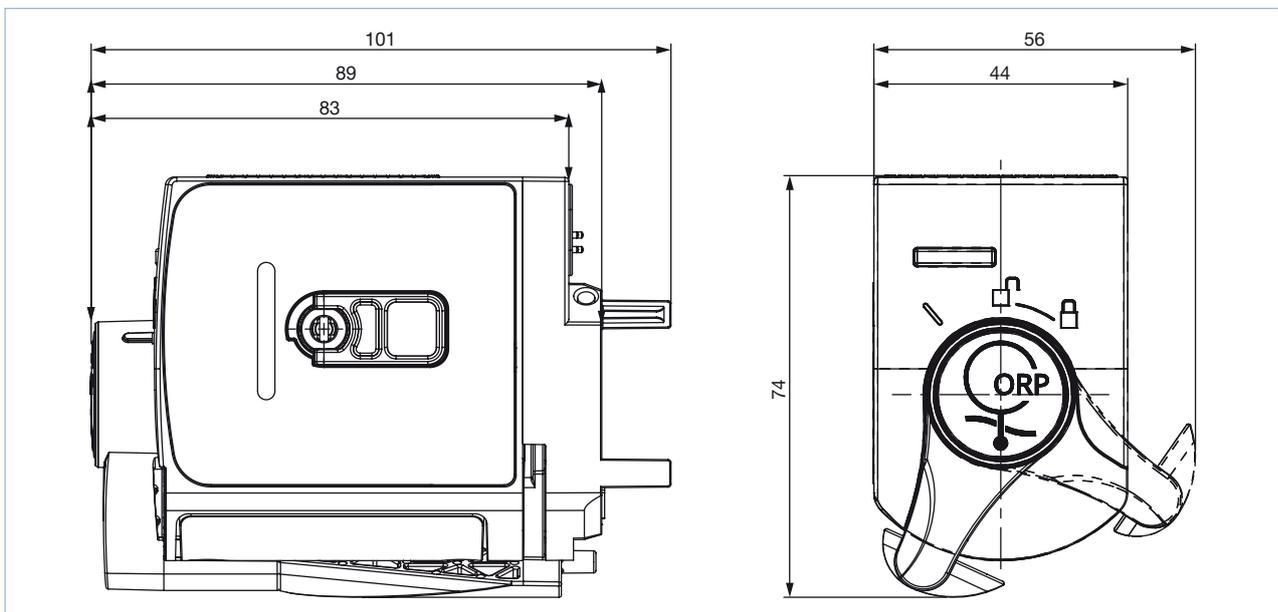


4. Product installation

4.1. Installation notes

Note:


- The sensor cube is designed for use with the online analysis system, Type 8905. The sensor cube is simply plugged into the backplane in Type 8905.
- It is also possible to mount the backplane individually on a DIN rail.

See **data sheet Type 8905** ▶ Online Analysis System for more information.

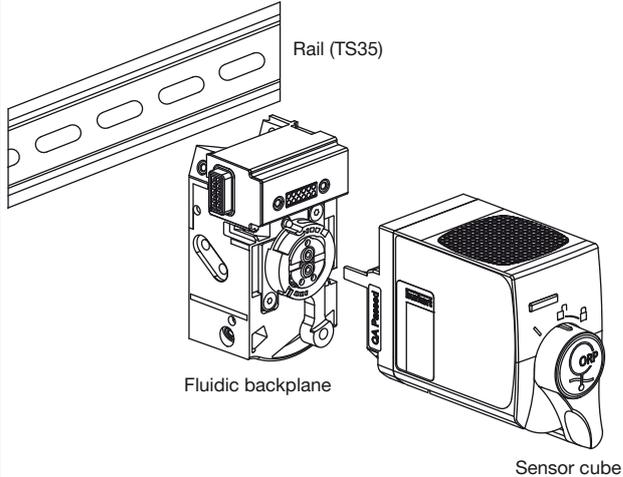Installation examples	
<p>Product mounted in a housing for the Online analysis system Type 8905.</p> <ul style="list-style-type: none"> • ORP sensor cube Type MS04 • Housing Type 8905 with display Type ME21 and controller Type ME25 	<p>Product without housing mounted of the backplane on standard rail (TS35).</p>  <p>Rail (TS35)</p> <p>Fluidic backplane</p> <p>Sensor cube</p>

5. Product design and assembly

5.1. Product features

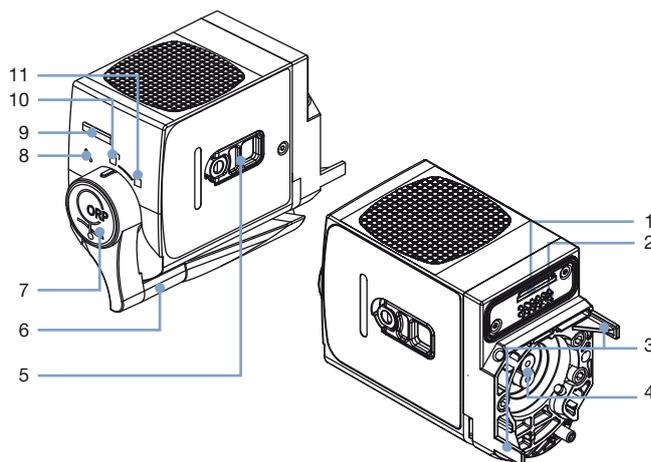

Product without housing

No.	Element
1	Slot micro-SIM card (for configuration data)
2	Electrical interface
3	Guide pins
4	Fluid connections
5	Housing of the external reference electrode
6	Lever to: <ul style="list-style-type: none"> • lock / unlock the product • carry out maintenance operations
7	Push button for unlocking
8	Maintenance position
9	Sensor cube Status LED
10	Unlocked position
11	Locked position

6. Ordering information

6.1. Bürkert eShop – Easy ordering and quick delivery



Bürkert eShop – Easy ordering and fast delivery

You want to find your desired Bürkert product or spare part quickly and order directly? Our online shop is available for you 24/7. Sign up and enjoy all the benefits.

[Order online now](#)

6.2. Bürkert product filter



Bürkert product filter – Get quickly to the right product

You want to select products comfortably based on your technical requirements? Use the Bürkert product filter and find suitable articles for your application quickly and easily.

[Try out our product filter](#)

6.3. Ordering chart

Note:

The ORP sensor cube must be operated within a system.

Please refer to the order information for Online Analysis System Type 8905, see [data sheet Type 8905](#) or contact your Bürkert representative.

Description	Article no.
ORP sensor cube	
Drinking water version (without anti-fouling), ACS approval	567627 
Standard version (with anti-fouling)	570692 

6.4. Ordering chart accessories

Description	Article no.
Buffer solution, 50 ml	
475 mV	807045 
External reference electrode	
Drinking water version (without anti-fouling), ACS approval	570699 
Drinking water version (without anti-fouling)	566084 
Standard version (with anti-fouling)	574042 
Replacement part set	
Measurement cell	568039 

Bürkert – Close to You

For up-to-date addresses
please visit us at
www.burkert.com

DTS 1000220810 EN Version: M Status: RL (released | freigegeben | validé) printed: 06.01.2025

